

SCHEUERLE - KAMAG

K 2504

51000018




Technical data

Travel speed	German traffic regulations 80 km/h	40 – 80 km/h	25 km/h	10 km/h	1 km/h
Payload	34.400 kg	54.400 kg	80.400 kg	102.400 kg	130.400 kg
Deadweight	13.600 kg				
Total weight	48.000 kg	68.000 kg	94.000 kg	116.000 kg	144.000 kg
Axle load	12.000 kg	16.000 kg	23.500 kg	29.000 kg	36.000 kg
Platform dimensions	approx. 6.000 x 3.000 mm				
Coupling length	approx. 6.000 mm				
Platform height center	approx.. 1.175 mm				
Axle compensation	approx. +/- 300 mm				
Platform height lowered	approx. 875 mm				
Steering / steering angle	hydraulical-mechanical / approx. +/- 60°				
Number of Wheel bogies / braked	8 / 8				
Brake performance	348 kN				
Tyres	32 x 215/75 R17,5 TL				
Oil volume	220 l				
Bending resistance of platform	approx. + 7.000 kNm				
Operating temperature	approx. -20°C up to +45°C				

The multifunctional transportation system for payloads up to 5 000 tons

K 2504

51000018

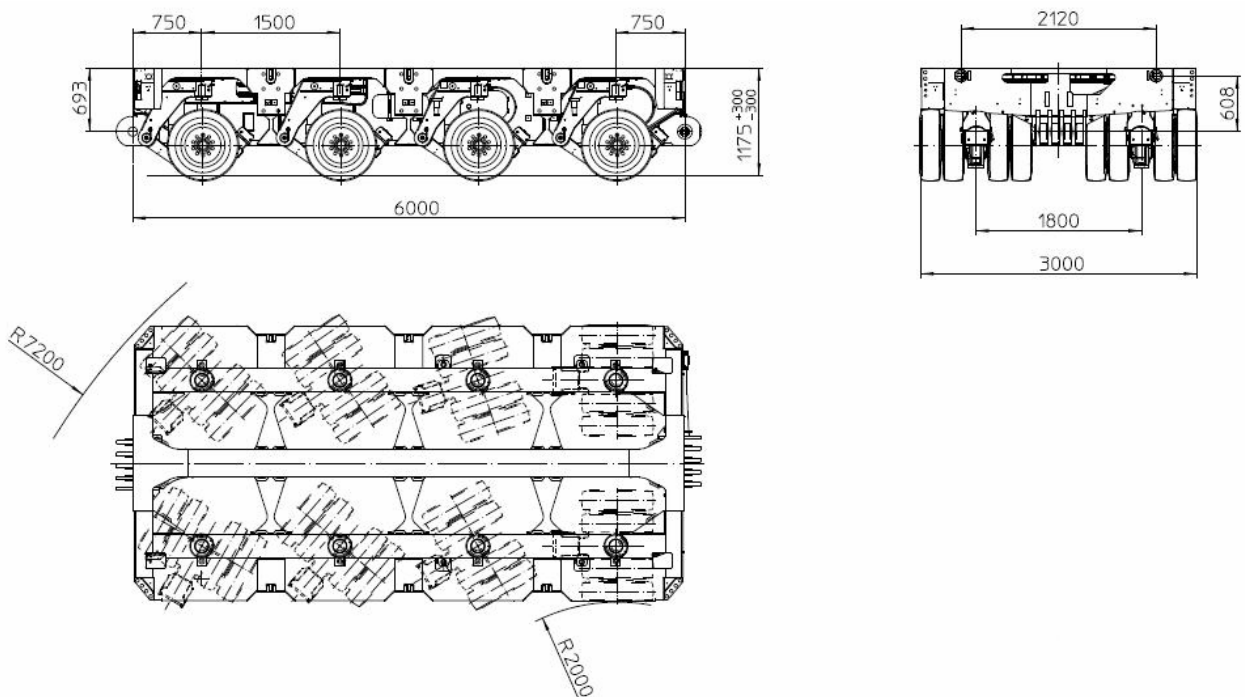

Standard accessories:

- 1 set of coupling hoses end to end
- 1 hydraulic coupling bolt