

SCHEUERLE - KAMAG

K 2506

51000020




Technical data

Travel speed	German traffic regulations 80 km/h	40 – 80 km/h	25 km/h	10 km/h	1 km/h
Payload	52.000 kg	72.000 kg	121.000 kg	148.000 kg	196.000 kg
Dead weight	20.000 kg				
Total weight	72.000 kg	96.000 kg	141.000 kg	168.000 kg	216.000 kg
Axle load	12.000 kg	16.000 kg	23.500 kg	28.000 kg	36.000 kg
Platform dimensions	approx. 9.000 x 3.000 mm				
Coupling length	approx. 9.000 mm				
Platform height center	approx. 1.175 mm				
Axle compensation	approx. +/- 300 mm				
Platform height lowered	approx. 875 mm				
Steering / steering angle	hydraulic-mechanical / approx. +/- 60°				
Number of Wheel bogies / braked	12 / 12				
Brake performance	522 kN				
Tyres	48 x 215/75 R17,5TL				
Oil tank volume	220l				
Bending resistance of platform	approx. 7.000 kNm				
Operating temperature	approx. -20°C up to +45°C				

The multifunctional transportation system for payloads up to 5 000 tons

K 2506

51000020

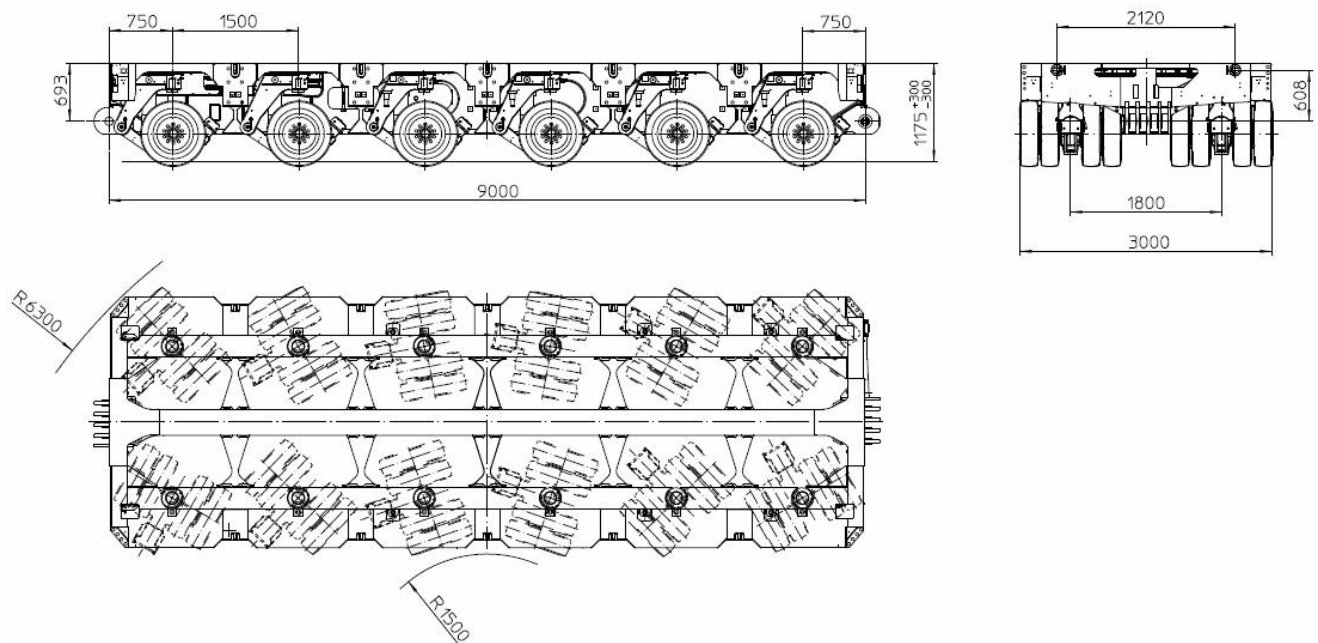

Standard accessories:

- 1 set of coupling hoses end to end
- 1 hydraulic coupling bolt